



Petrotec

EURO 1500 VI

STANDARD SPECIFICATIONS

Construction:

Frame: Galvanised carbon steel; double coated painting
Housing: Stainless steel (AISI 316)
Panels: Aluminium; double coated painting

Suction pump:

Monoblock, with gas separator and non-return valve

Meter:

Double-action positive displacement
Volume meter with 4 pistons
Accuracy: $\pm 0,2\%$

Filter:

Stainless steel, reusable, 100 μ m mesh filter easy to clean

Motor:

Eexd Motor single or three phase, 50/60 Hz with built in thermal protection

Counter:

Disco (dispenser controller counter) or CI 005

Protocols:

Petrotec, Pulse Interface, IFSF-LON, ER3, G, Others

Hose:

5/8", 3/4", and 1" or according to EN 1360 with textile reinforcement

Nozzle:

Automatic nozzle ZVA slimline



OPTIONS:

- DISPENSER / SUBMERGE
- 90 OR 130 L/MINUTE FLOW RATE
- SPEED SELECTION (50/90 L)
- SINGLEPHASE SUPPLY
- VOLUME PRESETTING
- STAINLESS STEEL SPRING MAST
- SIGHT GLASS
- BREAKAWAY IN THE NOZZLE OR HOSE
- COLOUR HOSES AND SLEEVES
- CUSTOMISED PAINTED PANELS
- INTERFACES TO OTHER EQUIPMENT
- SATELLITE
- CIRCUIT BREAKERS IN THE EQUIPMENT
- VAPOUR RECOVERY
- VAPOUR RECOVERY MONITORING SYSTEM
- FLEXIBLE PIPE
- ELECTRONICS HEATER
- FOUNDATIONS FRAME
- TAG READER



COMMERCIAL LINE EURO 1500 VI

Euro 1500 VI is ideal to individual or fleet use, quick and effective refuelling in 50, 90 or 130 litres per minute versions, in a very compact and attractive design.

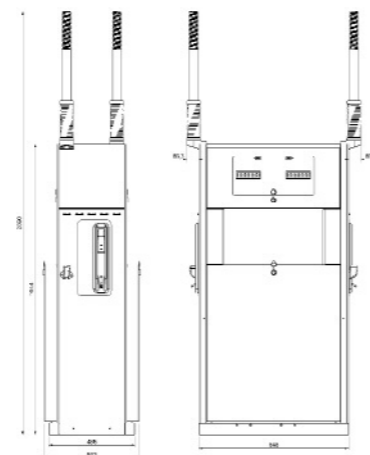

Weight:
85kg to 185Kg

Petrotec is continuously improving its products. Changes on the specifications may occur without prior notice.

PETROTEC MARKETING TEAM 2006

Parque Industrial de Guimarães - Pav. C2, Ponte
4800-493 Guimarães - Portugal
P. (+351) 253 479 300 F. (+351) 253 479 318
isd@petrotec.pt | www.petrotec.pt



EURO 1500 VI

MOD. B1500M 3 07_2006



Petrotec

Petrotec Group

In one of the most important economy sectors, Petrotec Group is one of its greatest references, due to the fact that it is one of the five largest manufacturers of the world, concerning the production of equipments to the oil industry distribution and retail, and the only one offering global solutions.

It has achieved its status and prestige on its own with no further than two decades of activity. With more than four hundred collaborators and several branches operating in four continents, Petrotec Group has been standing out not only due to its dynamics in a sector which is known by its high competitiveness, but also by the high satisfaction of its clients.

Petrotec Group is proud of belonging, for more than a decade, to the restrict group of manufacturers whose technology is 100 per cent their own, which reflects the technology potential of its research and development departments. It is also important to refer that all the activities are certificated according to the ISO 9001 and ISO 14001 standards.

Petrotec Group's current activity consists of fuel and LPG pumps production, research and development of hardware and software solutions, especially conceived or adapted to each client's specific needs, management and control systems in filling stations, car wash equipments, solutions for garages and maintenance services.

The largest oil companies of the world are some of Petrotec Group's clients, which has brought to it great pride and prestige. The aims are not only to consolidate but mainly to strengthen the already excellent position Petrotec Group occupies in the market. Thus it is trying to enlarge the distribution network as well as to develop partnerships in new markets.

EURO 1500 VI

In a market whose main characteristics are the extreme competitiveness and demand, excellence is not a mere luxury, but an obligation. It was in this context that the new Petrotec Euro 1500 VI series was born.

Euro 1500 VI was developed to serve private stations, in either single or double versions. It can easily be adapted to the most recent fleet management systems. It is equipped with one or two hoses, one for each product.

This wide range of characteristics allows Euro 1500 VI series to have a longer life cycle, and consequently a higher profitability to the business. The internal organs disposition was made aiming the effectiveness, by allowing quick servicing.

However, the highest quality manufacture standards can be also seen on the outside, since the Euro 1500 VI series technology is protected by a hermetic stainless steel outer covering, which guarantees its performance against the hardest environmental conditions.

- Excellent price/quality relation;
- Extraordinary reliability of its components;
- High quality manufacture standards;
- High flow rate levels;
- Modern and attractive compact design.



C1005 or DISCO Counter

The Counter is the electronic heart of VI series commercial line pumps. Due to its modular conception and high industrial technology, it achieves high levels of reliability and flexibility.

Through different optional interfaces it allows the connection to a wide range of fleet management terminals.

- Volume presetting 3-key keyboard (optional);
- Electronic and electromechanical totalizer for each hose;
- Flow select functions (optional);
- Satellite (optional).

TECHNICAL SPECIFICATIONS

- Numerical LCD Displays, with high contrast 1" digits
- Back-lightened Displays, visible from all angles
- **Number of digits**
- Volume: 6 digits



ELECTRONICS

- Electronics warming with thermostat (optional);
- Ability to operate in stand-alone and/or self-service, connected with fleet management systems.

SUCTION PUMP

- Monoblock fuel pump developed and produced by Petrotec, "RTF" model, of positive-displacement, high robustness;
- Integrated gas separator;
- Non-return valve integrated in the outlet;
- Bypass adjustable up to 3,5 bar;
- Pump activated by a pulley and Vbelt, temperature and hydrocarbonates proof, as well as by a flame proof motor;
- Tri-phase or single-phase connection, of 50 or 60 Hz;
- Stainless steel reusable 100µm suction filter;
- Ability to prime, with connection to the mechanical installation in 1 1/2" through a 400mm flexible pipe, or rigid pipes in dispenser case.

TECHNICAL SPECIFICATIONS

- Maximum flow rate: 50/90/130 L/Minute
- Minimum flow rate: 5 L/Minute
- Pump speed: 900/1470 r.p.m.
- Electric motor: 0.75/2.2 KW (with built in thermal protection)
- Pressure: 1.3/2.1/3 bar



METER

- Petrotec Meter, PTF25-80 model, per hose;
- The most reliable and the safest in the market, with decades of experience and high measuring accuracy, of about ± 0,2%, which is possible only to the 4 pistons meters;
- Positive-displacement meter, which assures, even in great streams, a continuous checking through the years.

TECHNICAL SPECIFICATIONS

- Precision: ± 0,2%
- Maximum pressure: 3 bar
- Maximum flow rate: 130 L/Minute
- Minimum flow rate: 2.5 L/Minute
- Volume per revolution: 0.5 L

