


Ecoline

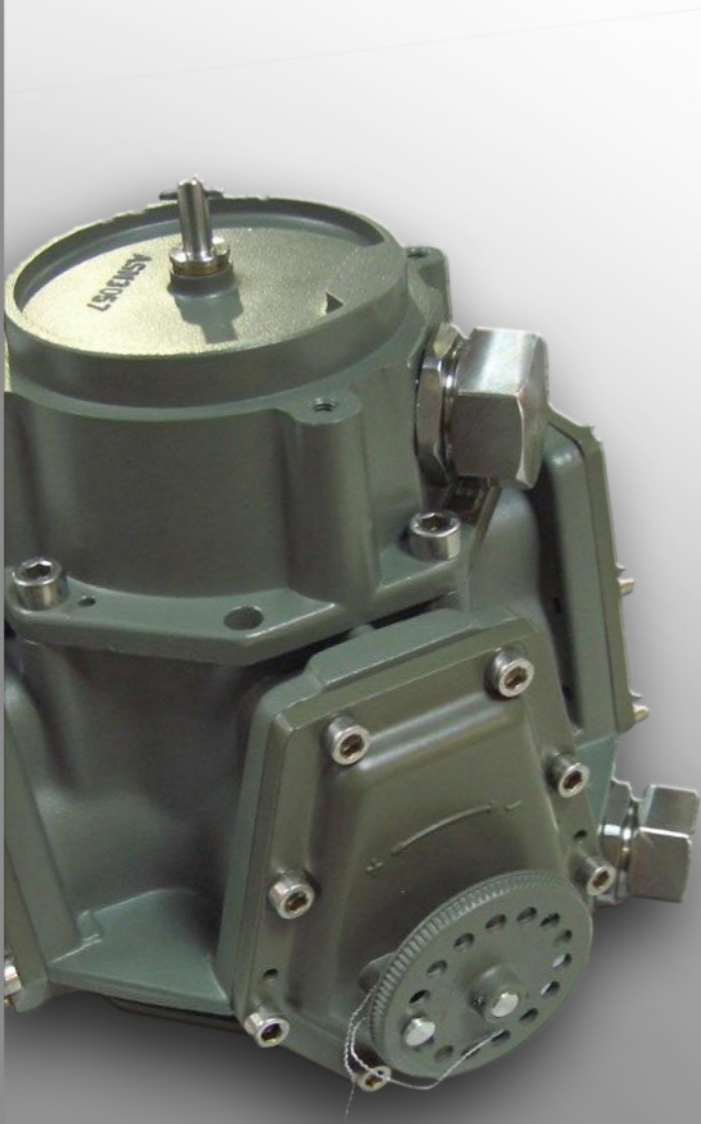

Standard equipment : 3000L or 5000L tank integrated in an isolated housing
 Heating
 Stainless Steel filling tube
 DDS-coupling
 Continuous level indication
 Overfill prevention
 Balancer 5m hose
 Elaflax-nozzle ZVA AdBlue

Concept : Housing from insulated Sandwich elements.
 2 Compartments: Compartment 1 is tight and acts as a bund
 Compartment 2 is the technical room
 Integrated Anti freeze heating
 Outside colour: white
 Optionals: Hot version (ventilation system activated by thermostat)

Type	Volume	Length	Width	Height	Kg
BL-3000	3000	2860mm	1170mm	2320mm	700
BL-5000	5000	3370mm	1530mm	2317mm	750

Filling point : Separated Stainless Steel filling tube integrated in the technical compartment
 2" dry coupling
 Overfill protection plug type Fafnir
 Level indicator
 Overfill prevention

Refuelling : Installed into compartment 2
 Standard foreseen with hose balancer system with 5m operational length.
 Elaflax automatic AdBlue nozzle with integrated magnet.
 Max flow 40l/min.
 Complete Stainless steel Blue 1 panel with isolated door
 Available in single side version or double side version
 Approved for Private and Retail use

Optionals : Hose reel for operational length up to 8 meters
 Active minimum level alarm with LED indication.
 Timer function (maximum dispensing time)
 Extension for satellite connexion.

Flow measurement equipment:

Private Use: Counter Petrotec CI 005
 Volume Display up to 6 digits
 1" digit size
 Volume Meter Petrotec PTF AdBlue
 8 digit electromechanical totalizer type
 5 bar maximum operating pressure

Retail Use: Approved according to MID B+D modules (NMI certification n.T10092)
 Calculator Petrotec CEM 03
 Volume Display up to 6 digits
 Value Display 4 digits
 Price/Litre Display up to 6 digits
 1" digit size
 Volume Meter Petrotec PTF AdBlue
 7 digit electromechanical totalizer type
 5 bar maximum operating pressure



Petrotec



Ecoline



PETROTEC Ecoline | Petrotec AdBlue Solutions



Headquarters

Parque Industrial de Guimarães, Pav. C2 / S. João de Ponte - 4805-661 GUIMARÃES - PORTUGAL

P. (+351) 253 479 300 F. (+351) 253 479 318

isd@petrotec.pt | www.petrotec.pt

